

Digital Multimeter

NOV@TEK


Nov@tek Digital Multimeter & Data Logger

Features



- True RMS, 6000 count, Digital Multimeter powered by USB
- It has seven measurement functions:
- Voltage , current, resistance, capacitance, diode and continuity, Temperature
- It is a continuous Data Recorder by USB in real time, creat trend curves.
- Software support Windows 7,8,8.1,10.

UI

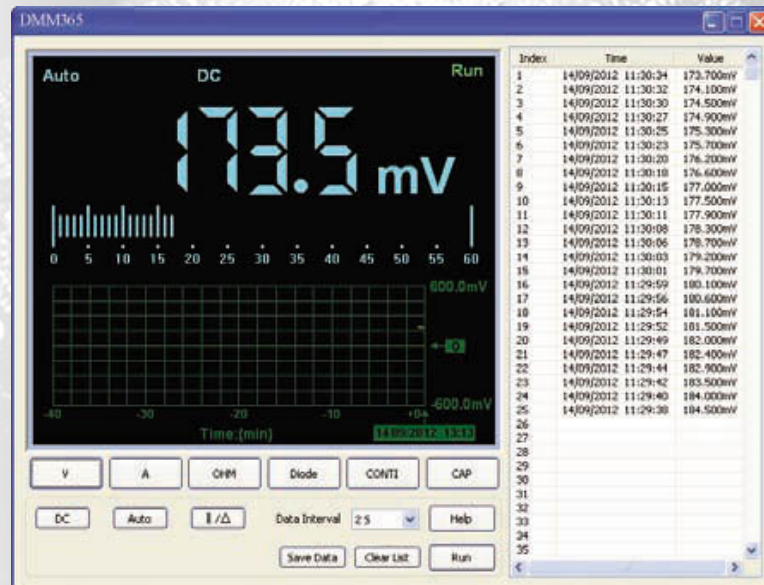

Order information

DMM-365 1pc
USB cable 1pc
Test Lead 1set
K-type Thermocouple 1pc
Software CD 1pc

Digital Multimeter



Specification

Function	Range	Accuracy	Resolution
DC Voltage	60.00mV	±1% ±1 digit	10uV
	600.00mV		100uV
	6.00V		1mV
	60.00V		10mV
	60.00V		100mV
	800V		1V
AC Voltage	60.00mV	±1%±3 digit	10uV
	600.00mV		100uV
	6.00V		1mV
	60.00V		10mV
	600.0V		100mV
DC Current	60.00mA	±1.5%±1 digit	10uA
	600.00mA	±1%±1 digit	100uA
	6.000A	±1.5%±3 digit	1mA
	10.00A		10mA
AC Current	60.00mA	±1.5%±1 digit	10uA
	600.00mA	±1%±1 digit	100uA
	6.000A	±1.5%±3 digit	1mA
	10.00A		10mA
Resistance	600	±1%±3 digit	0.1Ω
	6.000 K	±1%±1 digit	1Ω
	60.00 K		10Ω
	600.0 K		100Ω
	6.000 M		1KΩ
	60.00 M	±1.5%±3 digit	10KΩ
Capacitance	40.00nF	±1%±1 digit	10pF
	400.00nF		100pF
	4.000uF		1nF
	40.00uF		10pF
	400.0uF		100pF
	Attention: The smallest capacitance value that can be measured in 5nF		
Diode	0V~2.0V		
Dimensions	205 x 38 x 125 mm		
Weight:	430g		
Storage temperature and humidity	-40 °C to +70 °C , ≤90% relative humidity		